


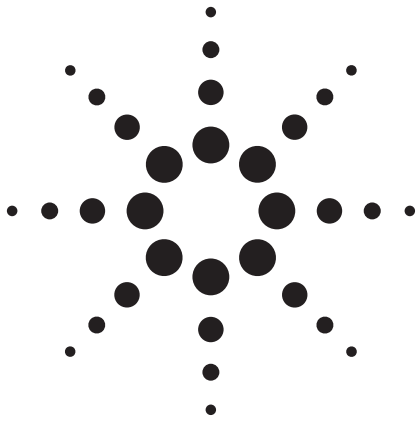

Agilent PNA Microwave Network Analyzers for Pulsed-RF Measurements

Configuration Guide


E8362B 10 MHz to 20 GHz

E8363B 10 MHz to 40 GHz

E8364B 10 MHz to 50 GHz

E8361A 10 MHz to 67 GHz

Please note: This document does not contain Agilent's most up-to-date PNA network analyzer portfolio. This document is available for reference only for customers using Agilent's legacy network analyzers. To view the current Agilent PNA Microwave Network Analyzers for Pulsed-RF Measurements Configuration Guide [click here](#).

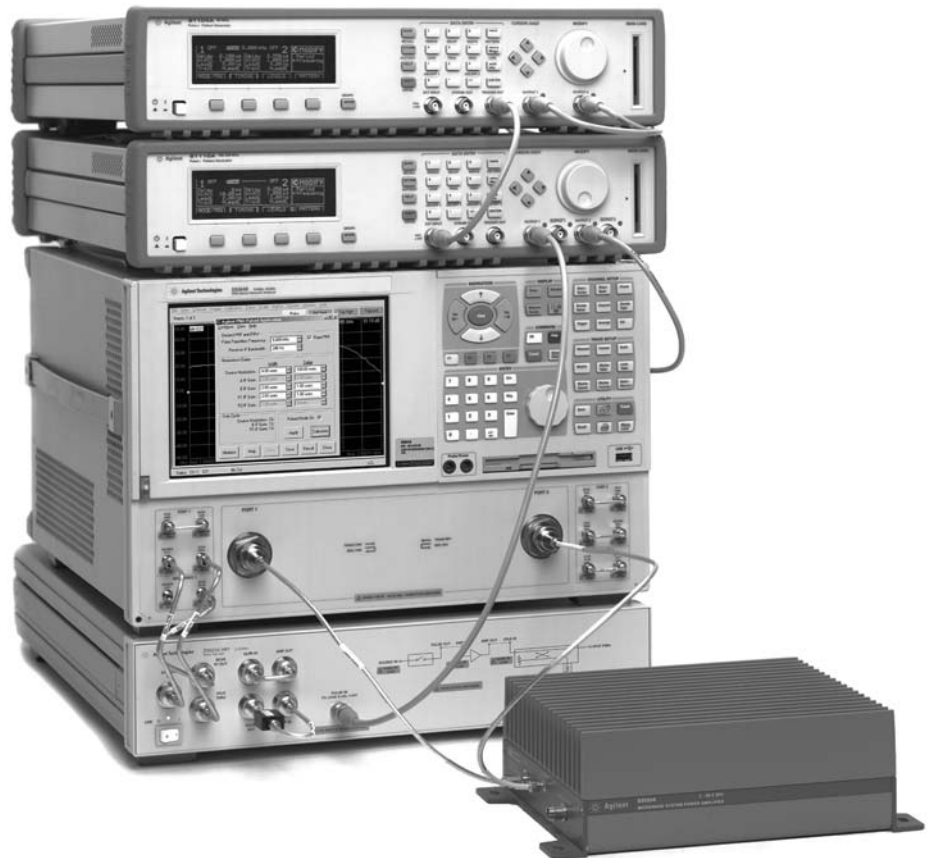

Agilent Technologies

Ordering Guide for Pulsed Measurements with the PNA Series

The following is a configuration guide for using the Agilent microwave PNA Series network analyzers in a pulsed S-parameter configuration. This guide is specifically for pulsed-RF measurements, and is intended to serve as a supplement to the PNA Series configuration guide. Both guides are available on the Agilent PNA Series Web site: www.agilent.com/find/pna

PNA Series Network Analyzers

Model Number Frequency Range

E8362/3/4B	10 MHz – 20/40/50 GHz
E8361A	10 MHz – 67 GHz

Recommended PNA options¹ for pulsed S-parameter measurements

E836xx-H08	Option H08 – Pulsed RF measurement capability Option H08 provides software for controlling the PNA and external pulse generators, for calculating the proper IF bandwidths for spectral nulling when using narrowband detection, and for profiling pulses in the time domain (magnitude and phase). Option H08 can be ordered alone, but Option H11 is needed for point-in-pulse and pulse-profile measurements.
E836xx-H11	Option H11 – IF access Option H11 provides IF switches that act as receiver gates, and are used for point-in-pulse and pulse-profile measurements. Option H08 is required to enable use of the gates. Option H11 also provides other hardware for use in antenna measurements (external IF inputs, and RF and LO outputs). Option H11 also requires options 014, 080, 081, and UNL.

Pulsed S-parameter Test Sets

Model Number	Description	Frequency Range
Z5623A H81	Contains a pin-diode switch to modulate the network analyzer's internal source, an amplifier, and a directional coupler to provide a pulsed-RF reference to the analyzer. This test set provides pulsed measurements in the forward direction and CW measurements in the reverse direction.	2 – 20 GHz
Z5623A H83	Contains two pin-diode switches to modulate the network analyzer's internal source for forward and reverse measurements.	2 – 20 GHz
Z5623A H84	Contains two pin-diode switch to modulate the network analyzer's internal source for forward and reverse measurements.	20 – 40 GHz
Z5623A H85	Contains one pin-diode switch to modulate the network analyzer's internal source for forward measurements.	20 – 40 GHz
Z5623A H86	Contains one pin-diode switches to modulate the network analyzer's internal source for forward measurements. Also contains a band switch to select 2-20 GHz or 20-40 GHz bands.	2 – 40 GHz

Note: Pulsed biasing can be achieved with or without the use of a pulsed-RF S-parameter test set. A proper pulsed-bias source must be used. Contact your local Agilent Sales Representative for additional pulsed-RF S-parameter test set configurations.

Pulse Generators

Pulse generators are required to provide the baseband pulse signals used for timing to the pulsed-RF S-parameter test-set and the PNA. At least one of the pulse generators in the system must have a 10 MHz reference to lock to the PNA. The pulse generator output modules must also be able to drive the PNA IF gates (1 k Ω impedance) with TTL-level signals. The Agilent 81110A pulse/pattern generator must be ordered with the associated number of 81111A output modules depending on the measurement configuration.

Model Number	Number of output modules required	Description of module usage (i.e. what the output module would drive)	Pulsed measurements available (w-point-in-pulse)
81104/110A	—	80/165 MHz single- or dual-channel pulse/pattern generator	—
81105/111A	2	RF modulation; B receiver gating	S21 with ungated reference
	3	RF modulation; A and B receiver gating	S11, S21 with ungated reference
	3	RF modulation; R1 and B receiver gating	S21 with gated reference
	4	RF modulation; R1, A and B receiver gating	S11, S21 with gated reference
	5 ²	RF modulation; R1, R2, A and B receiver gating	S11, S21, S12, S22 with gated references

Note: Gated reference means that the reference receiver measurement delay and width can be set independent of the measurement receivers' delay and width. A gated reference can be applied to a CW or pulsed-RF signal. Ungated reference means that no gating is applied to the reference receivers, which might have a CW or pulsed-RF signal.


1. For option details refer to the PNA Series Microwave Network Analyzers Configuration Guide, literature number 5988-7989EN available on the Web www.agilent.com/find/pna

2. Requires a pulsed-RF test S-parameter set with forward and reverse RF modulators.

Measurement Configuration Example

The figure below shows a pulsed solution with IF gating providing point-in-pulse capability for the 'A', 'B', and 'R1' measurement receivers. The test set configuration provides pulsed RF in the forward direction and a CW (non-pulsed) signal in the reverse direction. This configuration also supplies a pulsed signal to the R1 reference receiver. Three outputs of the pulse generators

are connected to the receiver (A, B, and R1) gate drive BNC connectors on the rear panel of the PNA. One output is connected to the test set to drive the modulator. The 10 MHz reference of one of the pulse generators and the PNA are locked together by connecting cables to the BNC connectors. The PNA controls each pulse generator via GPIB.

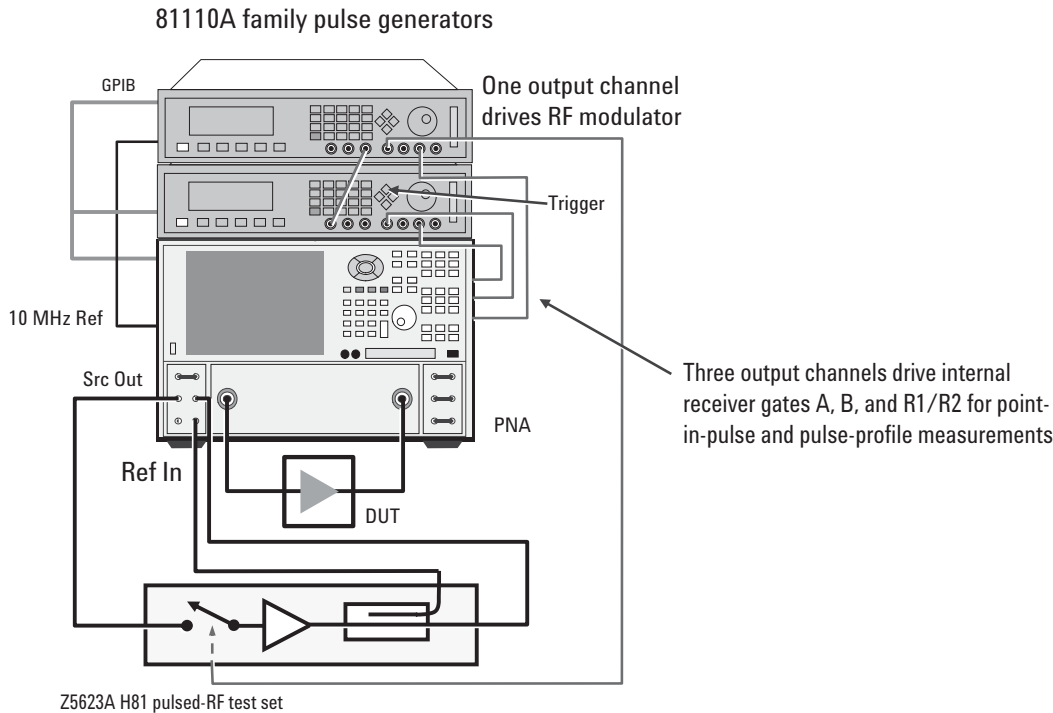

Pulse Measurement Option Description

Pulsed-RF measurement capability – Option H08

Provides software to set up and control pulsed-RF measurements with point-in-pulse and pulse-profile capability. The software sets the coefficients of the PNA's digital-IF filter to null out unwanted spectral components, enables the IF gates provided with IF access (Option H11), and controls the Agilent 81110A family of pulse generators. The software can be run on the PNA or an external computer, and a ".dll" file containing the IF-filter algorithm is included for automated pulsed-RF testing.

IF access – Option H11 (requires options 014, 080, 081, UNL)¹

Provides hardware to enable antenna, point-in-pulse, and pulse-profile measurements, as well as broadband millimeter-wave measurements to 110 GHz, and banded millimeter-wave measurements to 325 GHz. For each of the microwave PNA's measurement receivers, IF gates (enabled with pulsed-RF measurement capability Option H08) and external IF inputs are added. In addition, access to the PNA's internal RF and LO sources is provided for remote-mixing applications. For basic antenna measurements, only Option H11 is necessary. Pulsed- antenna applications also require the pulsed-measurement capability (Option H08). Millimeter-wave measurements also require an N5260A millimeter-wave test set controller.

1. For option details refer to the PNA Series Microwave Network Analyzers Configuration Guide, literature number 5988-7989EN, available on the Web www.agilent.com/find/pna

Web Resource

For additional literature and product information visit the microwave PNA Series Web site:

www.agilent.com/find/pna

RF and microwave accessories:

www.agilent.com/find/accessories



Agilent Email Updates

www.agilent.com/find/emailupdates

Get the latest information on the products and applications you select.



Agilent Direct

www.agilent.com/find/agilentdirect

Quickly choose and use your test equipment solutions with confidence.



www.agilent.com/find/open

Agilent Open simplifies the process of connecting and programming test systems to help engineers design, validate and manufacture electronic products. Agilent offers open connectivity for a broad range of system-ready instruments, open industry software, PC-standard I/O and global support, which are combined to more easily integrate test system development.

Remove all doubt

Our repair and calibration services will get your equipment back to you, performing like new, when promised. You will get full value out of your Agilent equipment throughout its lifetime. Your equipment will be serviced by Agilent-trained technicians using the latest factory calibration procedures, automated repair diagnostics and genuine parts. You will always have the utmost confidence in your measurements.

Agilent offers a wide range of additional expert test and measurement services for your equipment, including initial start-up assistance onsite education and training, as well as design, system integration, and project management.

For more information on repair and calibration services, go to:

www.agilent.com/find/removealldoubt

www.agilent.com

For more information on Agilent Technologies' products, applications or services, please contact your local Agilent office. The complete list is available at:

www.agilent.com/find/contactus

Americas

Canada	(877) 894-4414
Latin America	305 269 7500
United States	(800) 829-4444

Asia Pacific

Australia	1 800 629 485
China	800 810 0189
Hong Kong	800 938 693
India	1 800 112 929
Japan	0120 (421) 345
Korea	080 769 0800
Malaysia	1 800 888 848
Singapore	1 800 375 8100
Taiwan	0800 047 866
Thailand	1 800 226 008

Europe & Middle East

Austria	01 36027 71571
Belgium	32 (0)2 404 93 40
Denmark	45 70 13 15 15
Finland	358 (0)10 855 2100
France	0825 010 700*
	*0.125 €/minute
Germany	07031 464 6333
Ireland	1890 924 204
Israel	972-3-9288-504/544
Italy	39 02 92 60 8484
Netherlands	31 (0)20 547 2111
Spain	34 (91)631 3300
Sweden	0200-88 22 55
Switzerland	0800 80 53 53
United Kingdom	44 (0)118 9276201

Other European Countries:

www.agilent.com/find/contactus

Revised: October 6, 2008

Product specifications and descriptions in this document subject to change without notice.

© Agilent Technologies, Inc. 2004 – 2009
Printed in USA, February 3, 2009
5988-9833EN



Agilent Technologies