

Keysight Technologies

PXA X-Series Signal Analyzer

N9030A

3 Hz to 3.6, 8.4, 13.6, 26.5, 43, 44, or 50 GHz

Data Sheet

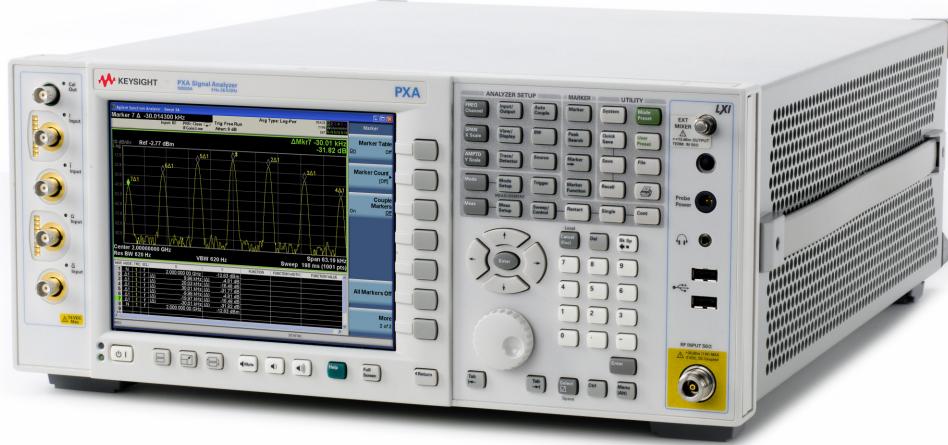


Table of Contents

Definitions and Conditions	3
Frequency and Time Specifications	4
Amplitude Accuracy and Range Specifications	6
Dynamic Range Specifications.....	9
PowerSuite Measurement Specifications	16
General Specifications	17
Inputs and Outputs	18
Other Optional Outputs.....	21
I/Q Analyzer.....	22
I/Q Analyzer – Option B25.....	24
I/Q Analyzer – Option B40	25
I/Q Analyzer – Option B85 or B1X.....	26
Real-time spectrum analyzer (RTSA)	27
Related Literature	28

This data sheet is a summary of the specifications and conditions for PXA signal analyzers. For the complete specifications guide, visit:
www.keysight.com/find/pxa_specifications

Drive your evolution

The Keysight Technologies, Inc. future-ready PXA signal analyzer is the evolutionary replacement for your current high-performance analyzer. It helps you sustain past achievements, enhance current designs and accelerate future innovations.

Its performance, flexibility, capability and compatibility enable you to address demanding applications in aerospace, defense, commercial communications and more.

- Reveal new levels of signal detail with outstanding RF performance
- Increase test throughput and protect your system investments
- Refresh legacy systems with a highly compatible replacement

Definitions and Conditions

Specifications describe the performance of parameters covered by the product warranty and apply to temperature ranges 0 to 55 °C, unless otherwise noted.

95th percentile values indicate the breadth of the population (approx. 2σ) of performance tolerances expected to be met in 95 percent of the cases with a 95 percent confidence, for any ambient temperature in the range of 20 to 30 °C. In addition to the statistical observations of a sample of instruments, these values include the effects of the uncertainties of external calibration references. These values are not warranted. These values are updated occasionally if a significant change in the statistically observed behavior of production instruments is observed.

Typical describes additional product performance information that is not covered by the product warranty. It is performance beyond specifications that 80 percent of the units exhibit with a 95 percent confidence level over the temperature range 20 to 30 °C. Typical performance does not include measurement uncertainty.

Nominal values indicate expected performance, or describe product performance that is useful in the application of the product, but is not covered by the product warranty.

The analyzer will meet its specifications when:

- The analyzer is within its calibration cycle.
- Under auto couple control, except that Auto Sweep Time Rules = Accy.
- For signal frequencies < 10 MHz, DC coupling applied.
- The analyzer has been stored at an ambient temperature within the allowed operating range for at least two hours before being turned on, if it had previously been stored at a temperature range inside the allowed storage range but outside the allowed operating range.
- The analyzer has been turned on at least 30 minutes with Auto Align set to normal, or if Auto Align is set to off or partial, alignments must have been run recently enough to prevent an Alert message. If the Alert condition is changed from Time and Temperature to one of the disabled duration choices, the analyzer may fail to meet specifications without informing the user.

For the complete specifications guide, visit:
www.keysight.com/find/pxa_specifications

Frequency and Time Specifications

Frequency range	DC coupled	AC coupled
Option 503	3 Hz to 3.6 GHz	10 MHz to 3.6 GHz
Option 508	3 Hz to 8.4 GHz	10 MHz to 8.4 GHz
Option 513	3 Hz to 13.6 GHz	10 MHz to 13.6 GHz
Option 526	3 Hz to 26.5 GHz	10 MHz to 26.5 GHz
Option 543	3 Hz to 43 GHz	NA
Option 544	3 Hz to 44 GHz	NA
Option 550	3 Hz to 50 GHz	NA
Band	LO multiple (N)	
0	1	3 Hz to 3.6 GHz
1	1	3.5 to 8.4 GHz
2	2	8.3 to 13.6 GHz
3	2	13.5 to 17.1 GHz
4	4	17 to 26.5 GHz
5	4	26.4 to 34.5 GHz
6	8	34.4 to 50 GHz
Precision frequency reference		
Accuracy	$\pm [(time\ since\ last\ adjustment \times aging\ rate) + temperature\ stability + calibration\ accuracy]$	
Aging rate	$\pm 1 \times 10^{-7} / year$ $\pm 1.5 \times 10^{-7} / 2\ years$	
Temperature stability		
20 to 30 °C	$\pm 1.5 \times 10^{-8}$	
Full temperature range	$\pm 5 \times 10^{-8}$	
Achievable initial calibration accuracy	$\pm 4 \times 10^{-8}$	
Example frequency reference accuracy	$= \pm (1 \times 1 \times 10^{-7} + 1.5 \times 10^{-8} + 4 \times 10^{-8})$	
1 year after last adjustment 20 to 30 °C	$= \pm 1.55 \times 10^{-7}$	
Residual FM		
Center frequency = 1 GHz	$\leq (0.25\ Hz \times N)\ p-p$ in 20 ms nominal	
10 Hz RBW, 10 Hz VBW	See band table above for N (LO multiple)	
Frequency readout accuracy (start, stop, center, marker)		
$\pm (marker\ frequency \times frequency\ reference\ accuracy + 0.10\% \times span + 5\% \times RBW + 2\ Hz + 0.5 \times horizontal\ resolution^1)$		
Marker frequency counter		
Accuracy	$\pm (marker\ frequency \times frequency\ reference\ accuracy + 0.100\ Hz)$	
Delta counter accuracy	$\pm (delta\ frequency \times frequency\ reference\ accuracy + 0.141\ Hz)$	
Counter resolution	0.001 Hz	
Frequency span (FFT and swept mode)		
Range	0 Hz (zero span), 10 Hz to maximum frequency of instrument	
Resolution	2 Hz	
Accuracy		
Swept	$\pm (0.1\% \times span + horizontal\ resolution)$	
FFT	$\pm (0.1\% \times span + horizontal\ resolution)$	

1. Horizontal resolution is span/(sweep points -1).

Sweep time and triggering

Range	Span = 0 Hz Span ≥ 10 Hz	1 µs to 6000 s 1 ms to 4000 s
Accuracy	Span ≥ 10 Hz, swept Span ≥ 10 Hz, FFT Span = 0 Hz	± 0.01% nominal ± 40% nominal ± 0.01% nominal
Sweep trigger	Free run, line, video, external 1, external 2, RF burst, periodic timer	
Trigger Delay	Span = 0 Hz or FFT Span ≥ 10 Hz, swept Resolution	-150 to +500 ms 0 to 500 ms 0.1 µs

Time gating

Gate methods	Gated LO; gated video; gated FFT
Gate length range (except method = FFT)	1 µs to 5.0 s
Gate delay range	0 to 100.0 s
Gate delay jitter	33.3 ns p-p nominal

Sweep (trace) point range

All spans	1 to 40001
-----------	------------

Resolution bandwidth (RBW)

Range (-3.01 dB bandwidth)	1 Hz to 3 MHz (10% steps), 4, 5, 6, 8 MHz	
Bandwidth accuracy (power)	1 Hz to 100 kHz 110 kHz to 1.0 MHz (< 3.6 GHz CF) 1.1 to 2 MHz (< 3.6 GHz CF) 2.2 to 3 MHz (< 3.6 GHz CF) 4 to 8 MHz (< 3.6 GHz CF)	± 0.5% (± 0.022 dB) ± 1.0% (± 0.044 dB) ± 0.07 dB nominal ± 0.10 dB nominal ± 0.20 dB nominal
RBW range	1 Hz to 1.3 MHz	± 2% nominal
Selectivity (-60 dB/-3 dB)		4:1:1 nominal
EMI bandwidth (CISPR compliant)	200 Hz, 9 kHz, 120 kHz, 1 MHz	(Option EMC required)
EMI bandwidth (MIL STD 461E compliant)	10 Hz, 100 Hz, 1 kHz, 10 kHz, 100 kHz, 1 MHz	(Option EMC required)

Analysis bandwidth ¹

Maximum bandwidth	Standard Option B25 Option B40 Option B85 Option B1X	10 MHz 25 MHz 40 MHz 85 MHz 160 MHz
-------------------	--	---

Video bandwidth (VBW)

Range	1 Hz to 3 MHz (10% steps), 4, 5, 6, 8 MHz, and wide open (labeled 50 MHz)
Accuracy	± 6% nominal (in swept mode and zero span)

Measurement speed ²

Local measurement and display update rate	10 ms (100/s) nominal
Remote measurement and LAN transfer rate	10 ms (100/s) nominal
Marker peak search	2.5 ms nominal
Center frequency tune and transfer (RF)	43 ms nominal
Center frequency tune and transfer (µW)	69 ms nominal
Measurement/mode switching	40 ms nominal

1. Analysis bandwidth is the instantaneous bandwidth available around a center frequency over which the input signal can be digitized for further analysis or processing in the time, frequency, or modulation domain.
 2. Sweep points = 101.

Amplitude Accuracy and Range Specifications

Amplitude range			
Measurement range			
Preamp Off	Displayed average noise level (DANL) to +30 dBm		
Preamp On			
RF (Opt 503)	Displayed average noise level (DANL) to +30 dBm		
Microwave (Opt 508, 513, 526)	Displayed average noise level (DANL) to +24 dBm		
Millimeter-wave (Opt 543, 544, 550)	Displayed average noise level (DANL) to +20 dBm		
Input attenuator range (3 Hz to 50 GHz)	0 to 70 dB in 2 dB steps		
Electronic attenuator (Option EA3)			
Frequency range	3 Hz to 3.6 GHz		
Attenuation range			
Electronic attenuator range	0 to 24 dB, 1 dB steps		
Full attenuation range (mechanical + electronic)	0 to 94 dB, 1 dB steps		
Maximum safe input level			
Average total power (with and without preamp)	+30 dBm (1 W)		
Peak pulse power	< 10 µs pulse width, < 1% duty cycle +50 dBm (100 W) and input attenuation ≥ 30 dB		
DC volts			
DC coupled	± 0.2 Vdc		
AC coupled	± 100 Vdc (For frequency Option 503, 508, 513, or 526)		
Display range			
Log scale	0.1 to 1 dB/division in 0.1 dB steps 1 to 20 dB/division in 1 dB steps (10 display divisions)		
Linear scale	10 divisions		
Scale units	dBm, dBmV, dBµV, dBmA, dBµA, V, W, A		
Frequency response		Specification	
(10 dB input attenuation, 20 to 30 °C, preselector centering applied above 3.6 GHz)			
RF/MW (Option 503, 508, 513, 526)	3 Hz to 10 MHz 10 to 20 MHz 20 MHz to 3.6 GHz 3.5 to 8.4 GHz 8.3 to 13.6 GHz 13.5 to 22.0 GHz 22.0 to 26.5 GHz	± 0.46 dB ± 0.35 dB ± 0.35 dB ± 1.5 dB ± 2.0 dB ± 2.0 dB ± 2.5 dB	± 0.16 dB ± 0.39 dB ± 0.45 dB ± 0.62 dB ± 0.82 dB
Millimeter-Wave (Option 543, 544, 550)	3 Hz to 20 MHz 20 to 50 MHz 50 MHz to 3.6 GHz 3.5 to 5.2 GHz 5.2 to 8.4 GHz 8.3 to 13.6 GHz 13.5 to 17.1 GHz 17.0 to 22.0 GHz 22.0 to 26.5 GHz 26.4 to 34.5 GHz 34.4 to 50 GHz	± 0.46 dB ± 0.35 dB ± 0.35 dB ± 1.7 dB ± 1.5 dB ± 2.0 dB ± 2.0 dB ± 2.0 dB ± 2.5 dB ± 2.5 dB ± 3.2 dB	± 0.19 dB ± 0.15 dB ± 0.70 dB ± 0.57 dB ± 0.54 dB ± 0.64 dB ± 0.72 dB ± 0.71 dB ± 0.93 dB ± 1.24 dB
Preamp on (0 dB attenuation) (Option P03, P08, P13, P26, P43, P44, P50)			
RF/MW (Option 503, 508, 513, 526)	9 to 100 kHz 100 kHz to 50 MHz 50 MHz to 3.6 GHz 3.5 to 8.4 GHz 8.3 to 13.6 GHz 13.5 to 17.1 GHz 17.0 to 22.0 GHz 22.0 to 26.5 GHz	± 0.68 dB ± 0.55 dB ± 2.0 dB ± 2.3 dB ± 2.5 dB ± 3.0 dB ± 3.5 dB	± 0.36 dB ± 0.26 dB ± 0.28 dB ± 0.64 dB ± 0.76 dB ± 0.95 dB ± 1.41 dB ± 1.61 dB

Millimeter-Wave (Option 543, 544, 550)	9 to 100 kHz 100 kHz to 50 MHz 50 MHz to 3.6 GHz 3.5 to 5.2 GHz 5.2 to 8.4 GHz 8.3 to 13.6 GHz 13.5 to 17.1 GHz 17.0 to 22.0 GHz 22.0 to 26.5 GHz 26.4 to 34.5 GHz 34.4 to 50 GHz	± 0.68 dB ± 0.60 dB ± 2.0 dB ± 2.0 dB ± 2.3 dB ± 2.5 dB ± 3.0 dB ± 3.5 dB ± 3.0 dB ± 4.1 dB	± 0.40 dB ± 0.34 dB ± 0.31 dB ± 0.81 dB ± 0.70 dB ± 0.79 dB ± 0.88 dB ± 1.07 dB ± 1.03 dB ± 1.35 dB ± 1.69 dB
---	---	--	---

Input attenuation switching uncertainty	Specifications	Additional information
Relative to 10 dB and preamp off		
At 50 MHz (reference frequency)	attenuation 12 to 40 dB attenuation 2 to 8 dB attenuation 0 dB	± 0.14 dB ± 0.18 dB ± 0.05 dB nominal
attenuation > 2 dB		
3 Hz to 3.6 GHz		± 0.3 dB nominal
3.5 to 8.4 GHz		± 0.5 dB nominal
8.3 to 13.6 GHz		± 0.7 dB nominal
13.5 to 26.5 GHz		± 0.7 dB nominal
26.4 to 50 GHz		± 1.0 dB nominal

Total absolute amplitude accuracy	Specifications
(10 dB attenuation, 20 to 30 °C, 1 Hz \leq RBW \leq 1 MHz, input signal -10 to -50 dBm, all settings auto-coupled except Auto Swp Time = Accy, any reference level, any scale, σ = nominal standard deviation)	
At 50 MHz	± 0.24 dB
At all frequencies	$\pm (0.24 \text{ dB} + \text{frequency response})$
10 Hz to 3.6 GHz	± 0.19 dB (95th Percentile approx. 2σ)
Preamp on (Option P03, P08, P13, P26, P43, P44 and P50)	At all frequencies $\pm (0.36 \text{ dB} + \text{frequency response})$

Input voltage standing wave ratio (VSWR)	Freq Opt 503, 508, 513, 526	Freq Opt 543, 544, 550
(10 dB input attenuation)		
50 MHz	1.07:1 nominal	1.025:1 nominal
10 MHz to 3.6 GHz	1.139 (95th percentile)	1.134 (95th percentile)
3.5 to 8.4 GHz	1.290 (95th percentile)	1.152 (95th percentile)
8.3 to 13.6 GHz	1.388 (95th percentile)	1.178 (95th percentile)
13.5 to 17.1 GHz	1.403 (95th percentile)	1.204 (95th percentile)
17.0 to 26.5 GHz	1.475 (95th percentile)	1.331 (95th percentile)
26.4 to 34.5 GHz	NA	1.321 (95th percentile)
34.4 to 50 GHz	NA	1.378 (95th percentile)
Preamp on (0 dB input attenuation)		
10 MHz to 3.6 GHz	1.45 (95th percentile)	1.393 nominal
3.5 to 8.4 GHz	1.54 (95th percentile)	1.50 (95th percentile)
8.3 to 13.6 GHz	1.57 (95th percentile)	1.310 (95th percentile)
13.5 to 17.1 GHz	1.48 (95th percentile)	1.330 (95th percentile)
17.0 to 26.5 GHz	1.54 (95th percentile)	1.339 (95th percentile)
26.4 to 34.5 GHz	NA	1.41 (95th percentile)
34.4 to 50 GHz	NA	1.42 (95th percentile)

Resolution bandwidth switching uncertainty (referenced to 30 kHz RBW)

1 Hz to 1.5 MHz RBW	± 0.03 dB
1.6 MHz to 2.7 MHz RBW	± 0.05 dB
3 MHz RBW	± 0.10 dB
4, 5, 6, 8 MHz RBW	± 0.30 dB

Reference level

Range	
Log scale	-170 to +30 dBm in 0.01 dB steps
Linear scale	707 pV to 7.07 V with 0.11% (0.01 dB) resolution
Accuracy	0 dB

Display scale switching uncertainty

Switching between linear and log	0 dB
Log scale/div switching	0 dB

Display scale fidelity

Between -10 dBm and -80 dBm input mixer level	± 0.10 dB total	± 0.04 dB typical
Below -18 dBm input mixer level	± 0.07 dB	± 0.02 dB typical

Trace detectors

Normal, peak, sample, negative peak, log power average, RMS average, and voltage average

Preamplifier

Frequency range ¹	Option P03	9 kHz to 3.6 GHz
	Option P08	9 kHz to 8.4 GHz
	Option P13	9 kHz to 13.6 GHz
	Option P26	9 kHz to 26.5 GHz
	Option P43	9 kHz to 43 GHz
	Option P44	9 kHz to 44 GHz
	Option P50	9 kHz to 50 GHz
Gain	9 kHz to 3.6 GHz	+20 dB nominal
	3.6 to 26.5 GHz	+35 dB nominal
	26.5 to 50 GHz	+40 dB nominal

1. Below 100 kHz, only 95th percentile (approx. 2σ) value for frequency response is provided.

Dynamic Range Specifications

1 dB gain compression (two-tone)		Maximum power at input mixer	
(At 1 kHz RBW with 100 kHz tone spacing, 20 to 30 °C)			
20 to 40 MHz	-3 dBm	0 dBm typical	
40 to 200 MHz	+1 dBm	+3 dBm typical	
200 MHz to 3.6 GHz	+3 dBm	+5 dBm typical	
3.6 to 16 GHz	+1 dBm	+4 dBm typical	
16 to 26.5 GHz	-1 dBm	+2 dBm typical	
26.5 to 50 GHz		0 dBm nominal	
Preamp on (Option P03, P08, P13, P26, P43, P44, and P50)	10 MHz to 3.6 GHz 3.6 to 26.5 GHz Tone spacing 100 kHz to 20 MHz Tone spacing > 70 MHz Freq Option ≤ 526 Freq Option > 526 26.5 to 50 GHz		-14 dBm nominal -28 dBm nominal -10 dBm nominal -20 dBm nominal -30 dBm nominal
Displayed average noise level (DANL)		Specification	Typical
(Input terminated, sample or average detector, averaging type = Log, 0 dB input attenuation, IF Gain = High, 1 Hz RBW, 20 to 30 °C)			
RF/MW (Option 503, 508, 513, 526)		Normal ¹ /LNP enabled ²	Normal ¹ /LNP enabled ²
Preamp off	3 Hz to 9 kHz 9 to 100 kHz 100 kHz to 1 MHz 1 to 10 MHz 10 MHz to 1.2 GHz 1.2 to 2.1 GHz 2.1 to 3.0 GHz 3.0 to 3.6 GHz 3.5 to 4.2 GHz 4.2 to 8.4 GHz 8.3 to 13.6 GHz 13.5 to 16.9 GHz 16.9 to 20.0 GHz 20.0 to 26.5 GHz	-146 dBm/NA -150 dBm/NA -155 dBm/NA -155 dBm/NA -153 dBm/NA -152 dBm/NA -151 dBm/NA -147 dBm/-153 dBm -150 dBm/-155 dBm -149 dBm/-155 dBm -145 dBm/-152 dBm -143 dBm/-151 dBm -137 dBm/-150 dBm	-100 dBm/NA typical -152 dBm/NA typical -156 dBm/NA typical -158 dBm/NA typical -157 dBm/NA typical -155 dBm/NA typical -154 dBm/NA typical -153 dBm/NA typical -150 dBm/-156 dBm typical -152 dBm/-157 dBm typical -151 dBm/-157 dBm typical -147 dBm/-155 dBm typical -145 dBm/-153 dBm typical -140 dBm/-152 dBm typical
Preamp on Option P03, P08, P13, P26	100 to 200 kHz 200 to 500 kHz 0.5 to 1 MHz	-157 dBm/NA -160 dBm/NA -164 dBm/NA	-160 dBm/NA typical -163 dBm/NA typical -166 dBm/NA typical
Option P03, P08, P13, P26 Option P03, P08, P13, P26 Option P03, P08, P13, P26 Option P08, P13, P26 ³ Option P13, P26 ³ Option P26 ³ Option P26 ³ Option P26 ³	1 to 10 MHz 10 MHz to 2.1 GHz 2.1 to 3.6 GHz 3.5 to 8.4 GHz 8.3 to 13.6 GHz 13.5 to 16.9 GHz 16.9 to 20.0 GHz 20.0 to 26.5 GHz	-164 dBm/NA -165 dBm/NA -163 dBm/NA -164 dBm/NA -163 dBm/NA -161 dBm/NA -159 dBm/NA -155 dBm/NA	-167 dBm/NA typical -166 dBm/NA typical -164 dBm/NA typical -166 dBm/NA typical -165 dBm/NA typical -162 dBm/NA typical -161 dBm/NA typical -157 dBm/NA typical
DANL with Noise Floor Extension (NFE) on ⁴		Improvement @ 95th percentile	
RF/MW (Option 503, 508, 513, 526)		Preamp Off	Preamp On
Band 0, f > 20 MHz		9 dB	10 dB
Band 1		10 dB	9 dB
Band 2		10 dB	10 dB
Band 3		9 dB	10 dB
Band 4		10 dB	8 dB
Examples of effective DANL Frequency 20 to 30 °C		LNP enabled ^{2,3}	
Mid-Band 0 (1.8 GHz)	-161 dBm	-171 dBm	NA
Mid-Band 1 (5.95 GHz)	-158 dBm	-172 dBm	-162 dBm
Mid-Band 2 (10.95 GHz)	-159 dBm	-168 dBm	-162 dBm
Mid-Band 3 (15.3 GHz)	-152 dBm	-165 dBm	-160 dBm
Mid-Band 4 (21.75 GHz)	-149 dBm	-160 dBm	-160 dBm

1. With the NFE (Noise Floor Extension) "Off".

2. LNP (Low Noise Path) requires option LNP.

3. At higher frequency bands (beyond 3.6 GHz), Preamp "On" supersedes "LNP enabled". LNP cannot operate simultaneously with preamp.

4. Beginning January 2015, all PXAs ship standard with the second-generation of NFE (instrument alignment based) installed as N9030A-NF2.

Millimeter-Wave (Option 543, 544, 550)		Normal ¹ /LNP enabled ²	Normal ¹ /LNP enabled ²
Preamp off			
	3 Hz to 9 kHz	-100 dBm/NA nominal	
	9 to 100 kHz	-152 dBm/NA typical	
	100 kHz to 1 MHz	-156 dBm/NA typical	
	1 to 10 MHz	-158 dBm/NA typical	
	10 MHz to 1.2 GHz	-157 dBm/NA typical	
	1.2 to 2.1 GHz	-155 dBm/NA typical	
	2.1 to 3 GHz	-153 dBm/NA typical	
	3 to 3.6 GHz	-154 dBm/NA typical	
	3.5 to 4.2 GHz	-153 dBm/NA typical	
	4.2 to 6.6 GHz	-153 dBm/NA typical	
	6.6 to 8.4 GHz	-154 dBm/NA typical	
	8.3 to 13.6 GHz	-155 dBm/NA typical	
	13.5 to 14 GHz	-156 dBm/NA typical	
	14 to 17 GHz	-157 dBm/NA typical	
	17 to 22.5 GHz	-158 dBm/NA typical	
	22.5 to 26.5 GHz	-159 dBm/NA typical	
	26.4 to 34 GHz	-160 dBm/NA typical	
	33.9 to 37 GHz	-161 dBm/NA typical	
	37 to 40 GHz	-162 dBm/NA typical	
	40 to 46 GHz	-163 dBm/NA typical	
	46 to 49 GHz	-164 dBm/NA typical	
	49 to 50 GHz	-165 dBm/NA typical	
Preamp on			
Option P03, P08, P13, P26, P43, P44, P50 ³	100 to 200 kHz	-157 dBm/NA	-160 dBm/NA typical
	200 to 500 kHz	-160 dBm/NA	-163 dBm/NA typical
	500 kHz to 1 MHz	-162 dBm/NA	-165 dBm/NA typical
	1 to 10 MHz	-164 dBm/NA	-167 dBm/NA typical
	10 MHz to 2.1 GHz	-164 dBm/NA	-166 dBm/NA typical
	2.1 to 3.6 GHz	-163 dBm/NA	-164 dBm/NA typical
Option P08, P13, P26, P43, P44, P50 ³	3.5 to 8.4 GHz	-161 dBm/NA	-163 dBm/NA typical
Option P13, P26, P43, P44, P50 ³	8.3 to 13.6 GHz	-161 dBm/NA	-163 dBm/NA typical
Option P26, P43, P44, P50 ³	13.5 to 17 GHz	-161 dBm/NA	-163 dBm/NA typical
	17 to 20 GHz	-160 dBm/NA	-163 dBm/NA typical
	20 to 26.5 GHz	-158 dBm/NA	-161 dBm/NA typical
Option P43, P44, P50 ³	26.4 to 30 GHz	-157 dBm/NA	-159 dBm/NA typical
	30 to 34 GHz	-155 dBm/NA	-158 dBm/NA typical
	33.9 to 37 GHz	-153 dBm/NA	-157 dBm/NA typical
	37 to 40 GHz	-152 dBm/NA	-156 dBm/NA typical
	40 to 43 GHz	-149 dBm/NA	-154 dBm/NA typical
Option P44, P50 ³	43 to 44 GHz	-149 dBm/NA	-154 dBm/NA typical
Option P50 ³	44 to 46 GHz	-149 dBm/NA	-154 dBm/NA typical
	46 to 50 GHz	-146 dBm/NA	-150 dBm/NA typical

1. With the NFE (Noise Floor Extension) "Off".

2. LNP (Low Noise Path) requires option LNP.

3. At higher frequency bands (beyond 3.6 GHz), Preamp "On" supersedes "LNP enabled". LNP cannot operate simultaneously with preamp.

DANL with Noise Floor Extension (NFE) on		Improvement @ 95th percentile		
Millimeter-Wave (Option 543, 544, 550)		Preamp Off	Preamp On	LNP enabled ^{1,2}
Band 0, f > 20 MHz		10 dB	9 dB	N/A
Band 1		9 dB	9 dB	10 dB
Band 2		9 dB	8 dB	9 dB
Band 3		9 dB	8 dB	10 dB
Band 4		10 dB	9 dB	11 dB
Band 5		11 dB	9 dB	12 dB
Band 6		11 dB	8 dB	11 dB
Example of effective DANL Frequency 20 to 30 °C	Preamp Off	Preamp On	LNP enabled ^{1,2}	
Mid-Band 0 (1.8 GHz)	-160 dBm	-172 dBm	N/A	
Mid-Band 1 (5.95 GHz)	-154 dBm	-164 dBm	-157 dBm	
Mid-Band 2 (10.95 GHz)	-155 dBm	-167 dBm	-157 dBm	
Mid-Band 3 (15.3 GHz)	-154 dBm	-167 dBm	-157 dBm	
Mid-Band 4 (21.75 GHz)	-152 dBm	-165 dBm	-157 dBm	
Mid-Band 5 (30.4 GHz)	-148 dBm	-160 dBm	-157 dBm	
Mid-Band 6 (42.7 GHz)	-143 dBm	-156 dBm	-150 dBm	

1. LNP (Low Noise Path) requires option LNP.

2. At higher frequency bands (beyond 3.6 GHz), Preamp "On" supersedes "LNP enabled". LNP cannot operate simultaneously with preamp.

Residues, images, and spurious responses

Residual responses (Input terminated and 0 dB attenuation)	200 kHz to 8.4 GHz Zero span or FFT or other frequencies	-100 dBm -100 dBm nominal
Image responses	Tuned Freq (f)	Excitation Freq Response
(Mixer level at -10 dBm)	10 MHz to 26.5 GHz 10 MHz to 3.6 GHz 10 MHz to 3.6 GHz 3.5 to 13.6 GHz 13.5 to 17.1 GHz 17.0 to 22 GHz 22 to 26.5 GHz	f+45 MHz -80 dBc -118 dBc typical f+10,245 MHz -80 dBc -112 dBc typical f+645 MHz -80 dBc -101 dBc typical f+645 MHz -78 dBc -87 dBc typical f+645 MHz -74 dBc -84 dBc typical f+645 MHz -70 dBc -82 dBc typical f+645 MHz -68 dBc -79 dBc typical
(Mixer level at -30 dBm)	26.5 to 34.5 GHz 34.4 to 44 GHz 44 to 50 GHz	f+645 MHz -68 dBc -84 dBc typical f+645 MHz -57 dBc -79 dBc typical f+645 MHz -75 dBc nominal

Other spurious responses	Mixer level	Response
Carrier frequency \leq 26.5 GHz		
First RF order ($f \geq 10$ MHz from carrier)	-10 dBm	-80 dBc + 20log(N ¹) Including IF feedthrough, LO harmonic mixing responses
Higher RF order ($f \geq 10$ MHz from carrier)	-40 dBm	-80 dBc + 20log(N ¹) Including higher order mixer responses
Carrier frequency $>$ 26.5 GHz		
First RF order ($f \geq 10$ MHz from carrier)	-30 dBm	-90 dBc nominal
Higher RF order ($f \geq 10$ MHz from carrier)	-30 dBm	-90 dBc nominal
LO-related spurious responses (200 Hz \leq f < 10 MHz from carrier), Mixer level at -10 dBm	-68 dBc ² + 20log(N ¹)	
Line-related spurious responses		-73 dBc ² + 20log(N ¹) (nominal)

Second harmonic distortion (SHI)

	Source frequency	Mixer level	Distortion ³	SHI ³
RF/MW (Option 503, 508, 513, 526)	10 to 100 MHz 0.1 to 1.8 GHz 1.75 to 2.5 GHz 2.5 to 4 GHz 4 to 6.5 GHz 6.5 to 10 GHz 10 to 13.25 GHz	-15 dBm -15 dBm -15 dBm -15 dBm -15 dBm -15 dBm -15 dBm	-57 dBc/NA -60 dBc/NA -77 dBc/-95 dBc -77 dBc/-101 dBc -77 dBc/-105 dBc -70 dBc/-105 dBc -62 dBc/-105 dBc	+42 dBm/NA +45 dBm/NA +62 dBm/+80 dBm +62 dBm/+86 dBm +62 dBm/+90 dBm +55 dBm/+90 dBm +47 dBm/+90 dBm
	Preamplifier level	Distortion	SHI	
Preamplifier on (Option P03, P08, P13, P26)	10 MHz to 1.8 GHz 1.8 to 13.25 GHz	-45 dBm -50 dBm	-78 dBc nominal -60 dBc nominal	+33 dBm nominal +10 dBm nominal
Millimeter-Wave	Mixer level	Distortion ³	SHI ³	
(Option 543, 544, 550)	10 to 100 MHz 100 M to 1.8 GHz 1.8 to 2.5 GHz 2.5 to 3 GHz 3 to 5 GHz 5 to 6.5 GHz 6.5 to 10 GHz 10 to 13.25 GHz 13.25 to 25 GHz	-15 dBm -15 dBm -15 dBm -15 dBm -15 dBm -15 dBm -15 dBm -15 dBm -15 dBm	-57 dBc/NA -60 dBc/NA -72 dBc/-95 dBc -72 dBc/-99 dBc -77 dBc/-99 dBc -77 dBc/-105 dBc -70 dBc/-105 dBc -62 dBc/-105 dBc -65 dBc/-105 dBc (nom.)	+42 dBm/NA +45 dBm/NA +57 dBm/+80 dBm +57 dBm/+84 dBm +62 dBm/+84 dBm +62 dBm/+90 dBm +55 dBm/+90 dBm +47 dBm/+90 dBm +50 dBm/+90 dBm (nom.)
Preamplifier on (Option P03, P08, P13, P26, P43, P44, P50)	Preamplifier level	Distortion	SHI	
	10 MHz to 1.8 GHz 1.8 to 13.25 GHz 13.25 to 25 GHz	-45 dBm -50 dBm -50 dBm	-78 dBc (nominal) -60 dBm (nominal) -50 dBm (nominal)	+33 dBm (nominal) +10 dBm (nominal) 0 dBm (nominal)

1. N is the LO multiplication factor. Refer to page 4 for the N value versus frequency ranges.

2. Nominally -40 dBc under large magnetic (0.38 Gauss rms) or vibrational (0.21 g rms) environmental stimuli.

3. Normal path/LNP enabled (requires Option LNP).

Third-order intermodulation distortion (TOI)

(two -16 dBm tones at input mixer with tone separation > 5 times IF prefilter bandwidth, 20 to 30 °C)

For all frequency options (Option 503, 508, 513, 526, 543, 544, and 550)	10 to 150 MHz 150 to 600 MHz 0.6 to 1.1 GHz 1.1 to 3.6 GHz	+13 dBm +18 dBm +20 dBm +21 dBm	+16 dBm typical +21 dBm typical +22 dBm typical +23 dBm typical
For RF/MW only (Option 503, 508, 513, and 526)	3.5 to 8.4 GHz 8.3 to 13.6 GHz 13.5 to 17.1 GHz 17.0 to 26.5 GHz	+17 dBm +17 dBm +15 dBm +16 dBm	+23 dBm typical +23 dBm typical +20 dBm typical +22 dBm typical
For Millimeter-Wave only (Option 543, 544, and 550)	3.5 to 8.4 GHz 8.3 to 13.6 GHz 13.5 to 17.1 GHz 17.0 to 26.5 GHz 26.5 to 50 GHz	+16 dBm +16 dBm +13 dBm +13 dBm +13 dBm	+23 dBm typical +23 dBm typical +17 dBm typical +20 dBm typical +13 dBm nominal
Preamp on (Option P03, P08, P13, P26, P43, P44, and P50)			
Tones at preamp input (two -45 dBm) (two -45 dBm) (two -50 dBm)	10 to 500 MHz 500 MHz to 3.6 GHz 3.6 to 26.5 GHz	+4 dBm nominal +4.5 dBm nominal -15 dBm nominal	

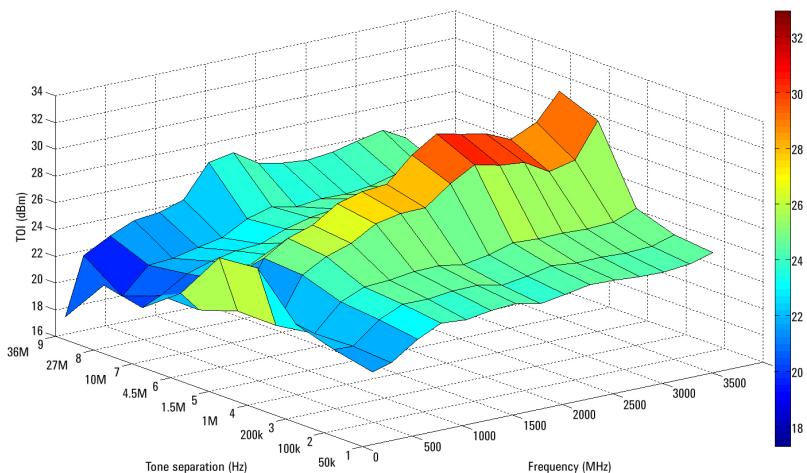


Figure 1. Nominal TOI performance versus frequency and tone separation

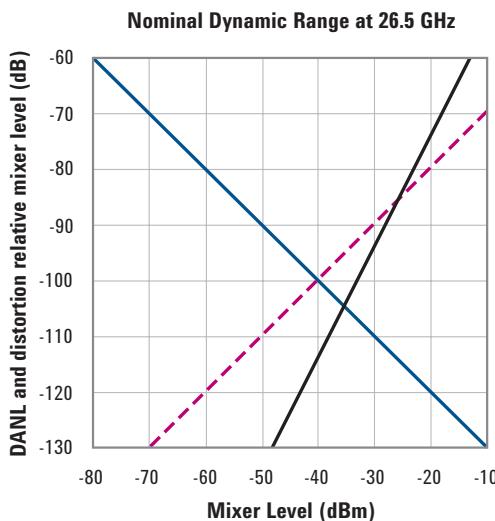
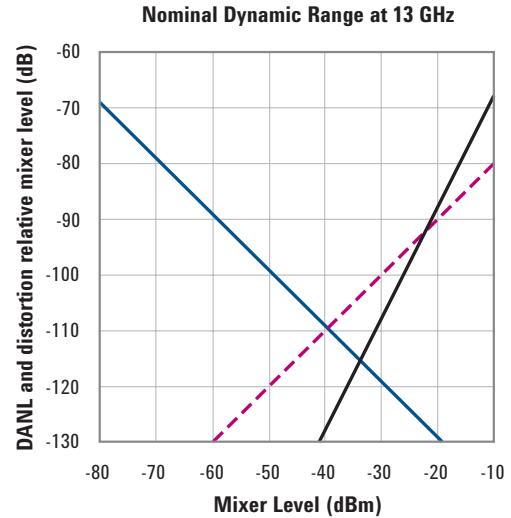
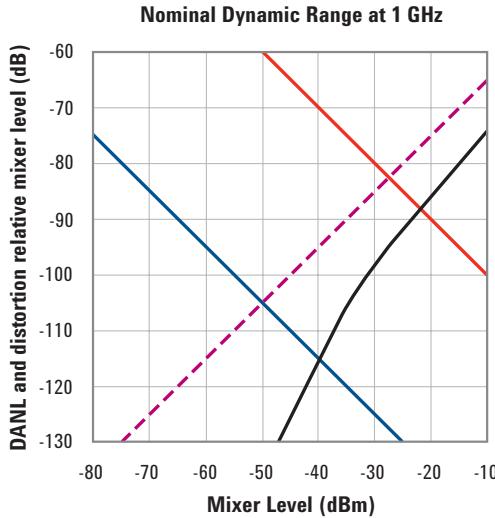


Figure 2a. Third-order dynamic range plots

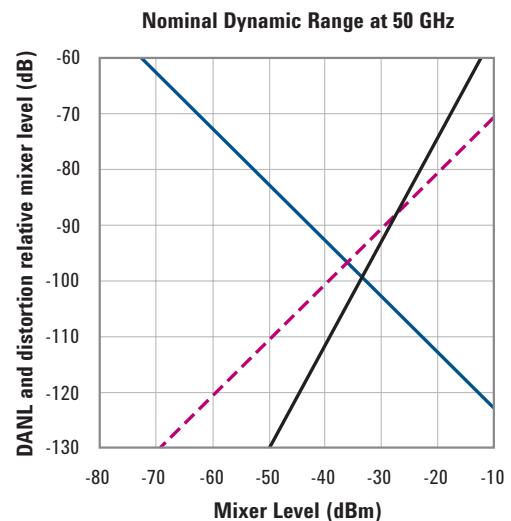


Figure 2b. Third-order dynamic range plots

- DANL (30 kHz RBW)
- DANL (1 Hz RBW)
- - - 2nd Harmonic Distortion
- 3rd Order Intermodulation

Phase noise	Offset	Specification	Typical
Noise sidebands (20 to 30 °C, CF = 1 GHz)	10 Hz	-80 dBc/Hz nominal	
	100 Hz	-94 dBc/Hz	-100 dBc/Hz typical
	1 kHz	-121 dBc/Hz	-125 dBc/Hz typical
	10 kHz	-129 dBc/Hz	-132 dBc/Hz typical
	30 kHz	-130 dBc/Hz	-132 dBc/Hz typical
	100 kHz	-129 dBc/Hz	-131 dBc/Hz typical
	1 MHz	-145 dBc/Hz	-146 dBc/Hz typical
	10 MHz	-155 dBc/Hz	-158 dBc/Hz typical

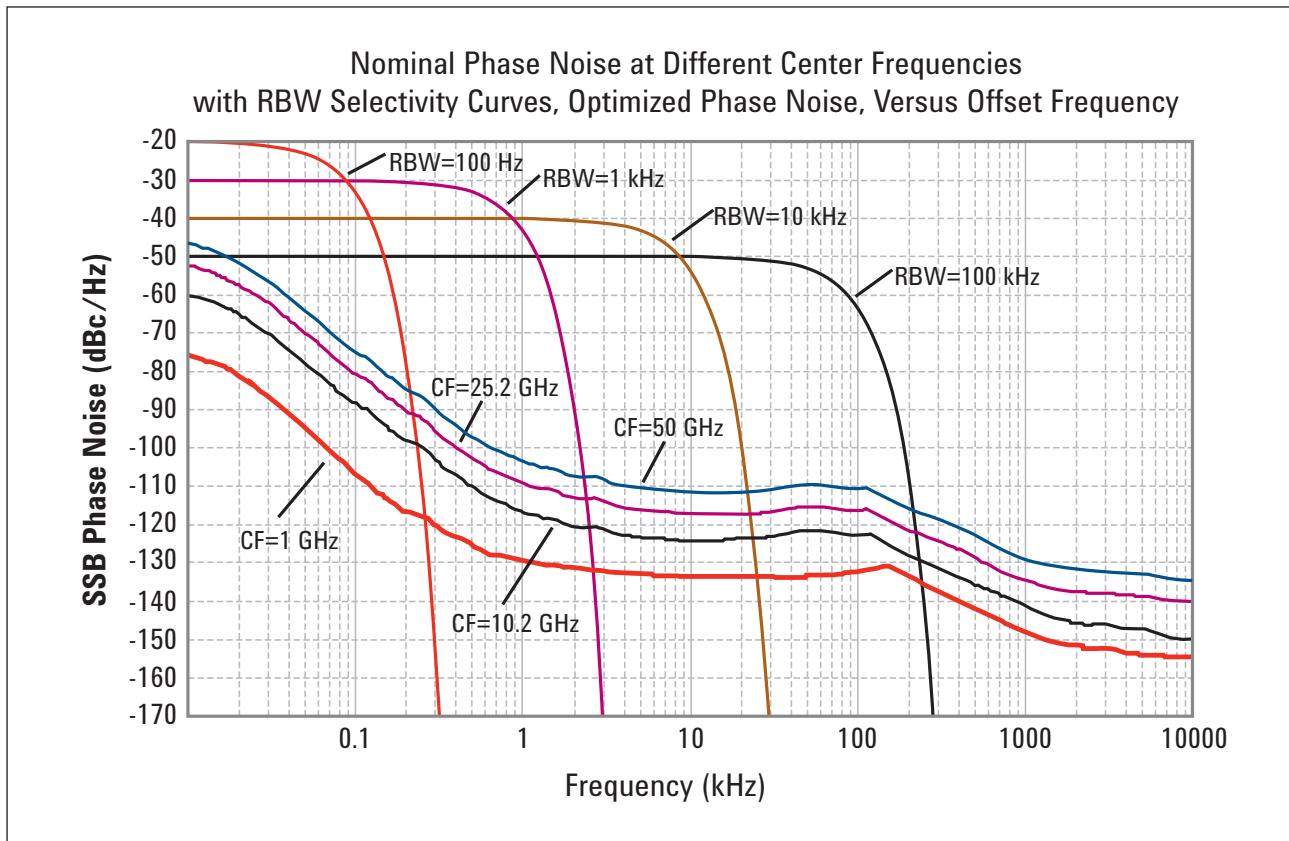


Figure 3. Nominal PXA phase noise at various center frequencies

Option MPB, microwave preselector bypass¹

Frequency range	
N9030A-508	3.6 to 8.4 GHz
N9030A-513	3.6 to 13.6 GHz
N9030A-526	3.6 to 26.5 GHz
N9030A-543	3.6 to 43 GHz
N9030A-544	3.6 to 44 GHz
N9030A-550	3.6 to 50 GHz

1. When Option MPB is installed and enabled, some aspects of the analyzer performance change. Please refer to the PXA specification guide for more details.

PowerSuite Measurement Specifications

Channel power		
Amplitude accuracy, W-CDMA or IS95 (20 to 30 °C, attenuation = 10 dB)	± 0.61 dB (± 0.19 dB 95th percentile)	
Occupied bandwidth		
Frequency accuracy	± [span/1000] nominal	
Adjacent channel power		
Accuracy, 3GPP W-CDMA (ACLR) (at specific mixer levels and ACLR ranges)	Adjacent	Alternate
MS (UE)	± 0.09 dB	± 0.16 dB
BTS	± 0.18 dB	± 0.31 dB
Dynamic range (typical)		
Without noise correction	-81.5 dB	-87 dB
With noise correction	-82.5 dB	-88 dB
Offset channel pairs measured	1 to 6	
Multi-carrier ACP		
Accuracy, 3GPP W-CDMA (ACPR) (4 carriers, 5 MHz offset, BTS, UUT ACPR range at -42 to -48 dB, optimal mixer level at -21 dBm)	± 0.13 dB	
Multiple number of carriers measured	Up to 12	
Power statistics CCDF		
Histogram resolution	0.01 dB	
Harmonic distortion		
Maximum harmonic number	10th	
Result	Fundamental power (dBm), relative harmonics power (dBc), total harmonic distortion in %	
Intermod (TOI)	Measure the third-order products and intercepts from two tones	
Burst power		
Methods	Power above threshold, power within burst width	
Results	Single burst output power, average output power, maximum power, minimum power within burst, burst width	
Spurious emission		
3GPP W-CDMA table-driven spurious signals; search across regions		
Dynamic range (1 to 3.6 GHz)	97.1 dB	(101.9 dB typical)
Absolute sensitivity (1 to 3.6 GHz)	-86.4 dBm	(-90.4 dBm typical)
Spectrum emission mask (SEM)		
cdma2000® (750 kHz offset)		
Relative dynamic range	81.6 dB	(86.4 dB typical)
Absolute sensitivity	-101.7 dBm	(-105.7 dBm typical)
Relative accuracy	± 0.08 dB	
3GPP W-CDMA (2.515 MHz offset)		
Relative dynamic range	85.4 dB	(89.8 dB typical)
Absolute sensitivity	-101.7 dBm	(-105.7 dBm typical)
Relative accuracy	± 0.08 dB	

General Specifications

Temperature range

Operating	0 to 55 °C
Storage	-40 to +70 °C

Altitude

4,500 meters (approx 15,000 feet)

EMC

Complies with European EMC Directive 2004/108/EC

- IEC/EN 61326-1 or IEC/EN 61326-2-1
- CISPR Pub 11 Group 1, class A¹
- AS/NZS CISPR 11:2002
- ICES/NMB-001

This ISM device complies with Canadian ICES-001

Cet appareil ISM est conforme à la norme NMB-001 du Canada

Safety

Complies with European Low Voltage Directive 2006/95/EC

- IEC/EN 61010-1 3rd Edition
- Canada: CSA C22.2 No. 61010-1-12
- USA: UL 61010-1 3rd Edition

Acoustic statement (European Machinery Directive 2002/42/EC, 1.7.4.2u)

Acoustic noise emission

LpA < 70 dB

Operator position

Normal position

Per ISO 7779

Acoustic noise - more information

(Values given are per ISO 7779 standard in the “Operator Sitting” position)

Ambient temperature

< 40 °C	Nominally under 55 dBA Sound Pressure. 55 dBA is generally considered suitable for use in quiet office environment
≥ 40 °C	Nominally under 65 dBA Sound Pressure. 65 dBA is generally considered suitable for use in noisy office environment

Environmental stress

Samples of this product have been type tested in accordance with the Keysight Environmental Test Manual and verified to be robust against the environmental stresses of storage, transportation, and end-use; those stresses include, but are not limited to, temperature, humidity, shock, vibration, altitude, and power line conditions; test methods are aligned with IEC 60068-2 and levels are similar to MILPRF-28800F Class 3.

Power requirements

Voltage and frequency	100 to 120 V, 50/60/400 Hz 220 to 240 V, 50/60 Hz				
Power consumption	<table> <tr> <td>On</td> <td>630 W (Maximum)</td> </tr> <tr> <td>Standby</td> <td>40 W</td> </tr> </table>	On	630 W (Maximum)	Standby	40 W
On	630 W (Maximum)				
Standby	40 W				

1. The N9030A is in full compliance with CISPR 11, Class A emissions and is declared as such. In addition, the N9030A has been type tested and shown to meet CISPR 11, Class B emissions limits. Information regarding the Class B emission performance of the N9030A is provided as a convenience to the user and is not intended to be a regulatory declaration.

Display	
Resolution	1024 x 768, XGA
Size	213 mm (8.4 in.) diagonal (nominal)
Data storage	
Internal	Removable solid state drive (80 GB)
External	Supports USB 2.0 compatible memory devices
Weight (without options)	
Net	22 kg (48 lbs) nominal
Shipping	34 kg (75 lbs) nominal
Dimensions	
Height	177 mm (7.0 in)
Width	426 mm (16.8 in)
Length	556 mm (21.9 in)
Warranty	
The PXA signal analyzer is supplied with a 3-year standard warranty	
Calibration cycle	
The recommended calibration cycle is one year. Calibration services are available through Keysight service centers	

Inputs and Outputs

Front panel	
RF input Connector	
Standard (Option 503, 508, 513, 526)	Type-N female, 50 Ω nominal
Option C35 (with Option 526 only)	APC 3.5 mm male, 50 Ω nominal
Standard (Option 543, 544, 550)	2.4 mm male, 50 Ω nominal
Analog baseband IQ inputs (Option BBA) ¹	
Connectors (I, Q, I-Bar, Q-Bar, and Cal Out)	BNC female
Cal Out	
Signal	AC coupled square wave
Frequency	Selectable between 1 kHz and 250 kHz
Input impedance (4 connectors: I, Q, I-, Q-)	50 Ω, 1 MΩ (selectable, nominal)
Probes supported ²	
Active probe	1130A, 1131A, 1132A, 1134A
Passive probe	1161A
Input return loss	-5 dB (0 to 10 MHz, nominal)
50 Ω impedance only selected	-0 dB (10 to 40 MHz, nominal)
Probe power	
Voltage/current	+15 Vdc, ± 7% at 150 mA max nominal -12.6 Vdc, ± 10% at 150 mA max nominal
USB 2.0 ports	
Master (2 ports)	Compatible with USB 2.0
Standard	USB Type-A female
Connector	0.5 A nominal
Output current	
Headphone jack	Miniature stereo audio jack (3.5 mm, also known as "1/8 inch")

- For additional specifications, please refer to Chapter BAA in the PXA Signal Analyzer specification guide
- For more details, please refer to the Keysight Probe Configuration Guides, literature numbers 5968-7141EN and 5989-6162EN; probe heads are necessary to attach to your device properly and probe connectivity kits such as E2668B, E2669A, or E2675A are required.

External mixing, Option EXM

Connection port	SMA, female
Connector	SMA
Impedance	50 Ω nominal

Functions Triplexed for mixer bias, IF input and LO output

Mixer bias range	± 10 mA in 10 μA step
IF input center frequency	
Narrowband IF path	322.5 MHz
40 MHz BW IF path	250.0 MHz
85 or 160 MHz BW IF path	300 MHz
LO output frequency range	3.75 to 14.0 GHz

Rear panel

10 MHz out	
Connector	BNC female, 50 Ω nominal
Output amplitude	≥ 0 dBm nominal
Frequency	10 MHz + (10 MHz × frequency reference accuracy)

Ext Ref In	
Connector	BNC female, 50 Ω nominal
Input amplitude range	-5 to 10 dBm nominal
Input frequency	1 to 50 MHz nominal (selectable to 1 Hz resolution)
Frequency lock range	± 2 × 10 ⁻⁶ of specified external reference input frequency

Trigger 1 and 2 inputs	
Connector	BNC female
Impedance	> 10 kΩ nominal
Trigger level range	-5 to +5 V (TTL) factory preset

Trigger 1 and 2 outputs	
Connector	BNC female
Impedance	50 Ω nominal
Level	0 to 5 V (CMOS) nominal

Sync (reserved for future use)	
Connector	BNC female

Monitor output	
Connector	VGA compatible, 15-pin mini D-SUB
Format	XGA (60 Hz vertical sync rates, non-interlaced) Analog RGB
Resolution	1024 x 768

Noise source drive +28 V (pulsed)	
Connector	BNC female
Output voltage	On 28.0 ± 0.1 V (60 mA maximum) Off < 1 V

SNS series noise source	For use with the Keysight SNS Series noise sources
-------------------------	--

Digital bus	
Connector	MDR-80

Rear panel

Analog out Connector	BNC female
USB 2.0 ports Master (4 ports) Standard Connector Output current	Compatible with USB 2.0 USB Type-A female 0.5 A nominal
Slave (1 port) Standard Connector Output current	Compatible with USB 2.0 USB Type-B female 0.5 A nominal
GPIB interface Connector GPIB codes GPIB mode	IEEE-488 bus connector SH1, AH1, T6, SR1, RL1, PPO, DC1, C1, C2, C3, C28, DT1, L4, CO Controller or device
LAN TCP/IP interface Standard Connector	1000Base-T RJ45 Ethertwist
IF output Connector Impedance	SMA female, shared by Optics CR3, CRP, and ALV 50 Ω nominal

2nd IF output, Option CR3

Center frequency SA mode or I/Q analyzer with IF BW ≤ 25 MHz with Option B40 with Option B85/B1X	322.5 MHz 250 MHz 300 MHz
Conversion gain	-1 to +4 dB (nominal) plus RF frequency response
Bandwidth Low band High band, with preselector High band, with preselector bypassed ¹	Up to 160 MHz (nominal) Depends on center frequency Up to 700 MHz (nominal); expandable to 900 MHz with corrections

Arbitrary IF output, Option CRP

Center frequency Range Resolution	10 to 75 MHz (user selectable) 0.5 MHz
Conversion gain	-1 to +4 dB (nominal) plus RF frequency response
Bandwidth Output at 70 MHz Low band or high band with preselector bypassed Preselected band	100 MHz (nominal) Depends on RF center frequency
Lower output frequencies	Subject to folding
Residual output signals	≤ -88 dBm (nominal)

1. The maximum bandwidth is not centered around the IF output center frequency.

Other Optional Output

Option ALV Log video out

General port specifications		
Connector	SMA female	Shared with other options
Impedance		50 Ω nominal
Fast log video output		
Output voltage	Open-circuit voltages shown	
Maximum	1.6 V at -10 dBm nominal	
Slope	25 ± 1 mV/dB nominal	
Log fidelity		
Range	49 dB (nominal) with input frequency at 1 GHz	
Accuracy within range	± 1.0 dB nominal	
Rise time	15 ns nominal	
Fall time		
Bands 1-4 with Option MPB	40 ns nominal best case,	
Other cases	Depends on bandwidth	

Option YAV Y-Axis output

General port specifications		
Connector	BNC female	Shared with other options
Impedance		50 Ω nominal
Screen video		
Operating conditions		
Display scale types	Log or Lin	"Lin" is linear in voltage
Log scales	All (0.1 to 20 dB/div)	
Modes	Spectrum analyzer only	
Gating	Gating must be off	
Output scaling	0 to 1.0 V open circuit, representing bottom to top of screen	
Offset	± 1% of full scale nominal	
Gain accuracy	± 1% of output voltage nominal	
Delay between RF input to analog output	71.7 μs +2.56/RBW + 0.159/VBW nominal	
Log video (Log envelope) output		
Amplitude range (terminated with 50 Ω)		
Maximum	1.0 V nominal for -10 dBm at the mixer	
Scale factor	1 V per 192.66 dB	
Bandwidth	Set by RBW	
Operating conditions	Select Sweep Type = Swept	
Linear video (AM Demod) output		
Amplitude range (terminated with 50 Ω)		
Maximum	1.0 V nominal for signal envelope at the reference level	
Minimum	0 V	
Scale factor	If carrier level is set to half the reference level in volts, the scale factor is 200% of carrier level per volt. Regardless of the carrier level, the scale factor is 100% of reference level per volt.	
Bandwidth	Set by RBW	
Operating conditions	Select Sweep Type = Swept	

I/Q Analyzer

Frequency

Frequency span	
Standard instrument	10 Hz to 10 MHz
Option B25	10 Hz to 25 MHz
Option B40	10 Hz to 40 MHz
Option B85	10 Hz to 85 MHz
Option B1X	10 Hz to 160 MHz

Resolution bandwidth (spectrum measurement)

Range	
Overall	100 mHz to 3 MHz
Span = 1 MHz	50 Hz to 3 MHz
Span = 10 kHz	1 Hz to 10 kHz
Span = 100 Hz	100 mHz to 100 Hz
Window shapes	Flat Top, Uniform, Hanning, Hamming, Gaussian, Blackman, Blackman-Harris, Kaiser Bessel (K-B 70 dB, K-B 90 dB and K-B 110 dB)

Analysis bandwidth (waveform measurement)

Standard instrument	10 Hz to 10 MHz
Option B25	10 Hz to 25 MHz
Option B40	10 Hz to 40 MHz
Option B85	10 Hz to 85 MHz
Option B1X	10 Hz to 160 MHz

IF frequency response (standard 10 MHz IF path)

IF frequency response (demodulation and FFT response relative to the center frequency)

Freq (GHz)	Analysis BW (MHz)	Max error	Midwidth error (95th percentile)	Slope (dB/MHz) (95th percentile)	RMS (nominal)
≤ 3.6	≤ 10	± 0.20 dB	± 0.12 dB	± 0.10 dB	0.02 dB
3.6 to 26.5	≤ 10 preselected				0.23 dB
3.6 to 26.5	≤ 10 preselector off ¹	± 0.25 dB	± 0.12 dB	± 0.10 dB	0.02 dB
26.5 to 50	≤ 10 preselected				0.12 dB
26.5 to 50	≤ 10 preselected off ¹	± 0.30 dB	± 0.12 dB	± 0.10 dB	0.024 dB

1. Option MPB is installed and enabled.

I/Q Analyzer (continued)

IF phase linearity								
Center freq (GHz)	Span (MHz)	Preselector	Peak-to-peak (nominal)	RMS (nominal)				
≥ 0.02, < 3.6	≤ 10	NA	0.06°	0.012°				
≥ 3.6 to ≤ 26.5	≤ 10	Off ¹	0.10°	0.022°				
≥ 3.6	≤ 10	On	0.11°	0.024°				
Dynamic range (standard 10 MHz IF path)								
Clipping-to-noise dynamic range				Excluding residuals and spurious responses				
Clipping level at mixer				Center frequency ≥ 20 MHz				
IF gain = Low	-10 dBm			-8 dBm nominal				
IF gain = High	-20 dBm			-17.5 dBm nominal				
Noise density at mixer at center frequency	(DANL + IF Gain effect) + 2.25 dB							
Data acquisition (standard 10 MHz IF path)								
Time record length								
Analysis tool								
IQ analyzer	4,000,000 IQ sample Pairs			Waveform measurement				
Advanced tools	Data packing		89600 VSA software or fast capture					
Length (IQ sample pairs)	32-bit	64-bit	2 GB total memory					
Length (time units)	536 MSa (2^{29} Sa) 268 MSa (2^{28} Sa) Samples/Sample rate (IQ pair)							
Sample rate								
IQ pairs	Span x 1.25							
ADC resolution	16 bits							

1. Option MPB is installed and enabled.

I/Q Analyzer (continued)

Option B25 25 MHz analysis bandwidth (Option B25 is automatically included in Option B40, B85 or B1X)

IF frequency response (B25 IF path)										
IF frequency response (demodulation and FFT response relative to the center frequency)										
Freq (GHz)	Analysis BW (MHz)	Max error	Midwidth error (95th percentile)	Slope (dB/MHz) (95th percentile)	RMS (nominal)					
< 3.6	10 to \leq 25	± 0.30 dB	± 0.12 dB	± 0.05 dB	0.02 dB					
3.6 to 26.5	10 to \leq 25 preselected				0.50 dB					
3.6 to 26.5	10 to \leq 25 preselector off ¹	± 0.40 dB			0.03 dB					
26.5 to 50	10 to \leq 25 preselected				0.31 dB					
26.5 to 50	10 to \leq 25 preselector off ¹	± 0.40 dB			0.02 dB					
IF phase linearity										
Center freq (GHz)	Span (MHz)	Preselector	Peak-to-peak (nominal)	RMS (nominal)						
$\geq 0.02, < 3.6$	≤ 25	NA	0.48°	0.12°						
≥ 3.6	≤ 25	Off ¹	0.85°	0.20°						
Dynamic range (B25 IF path)										
Full scale (ADC clipping)										
Default settings, signal at CF (IF gain = Low)										
Band 0	-8 dBm mixer level nominal									
Bands 1 through 4	-7 dBm mixer level nominal									
High gain setting, signal at CF (IF gain = High)										
Band 0	-18 dBm mixer level nominal, subject to gain limitations									
Bands 1 through 4	-17 dBm mixer level nominal, subject to gain limitations									
Effect of signal frequency \neq CF	Up to ± 3 dB nominal									
Data acquisition (B25 IF path)										
Time record length										
Analysis tool										
IQ analyzer	4,000,000 IQ sample Pairs			Waveform measurement						
Advanced tools	Data packing		89600 VSA software or fast capture							
	32-bit	64-bit								
Length (IQ sample pairs)	536 MSa (2^{29} Sa)	268 MSa (2^{28} Sa)	2 GB total memory							
Length (time units)	Samples/Sample rate (IQ pair)									
Sample rate										
IQ pairs	Span x 1.25									
ADC resolution	16 bits									

1. Option MPB is installed and enabled.

I/Q Analyzer (continued)

Option B40 40 MHz analysis bandwidth (Option B40 is automatically included in Option B85 or B1X)

IF frequency response (B40 IF path)							
IF frequency response		Relative to center frequency					
Center freq. (GHz)	Span (MHz)	Preselector	Typical	RMS (nominal)			
≥ 0.03, < 3.6	≤ 40	NA	± 0.4 dB	± 0.25 dB	0.05 dB		
≥ 3.6, ≤ 8.4	≤ 40	Off ¹	± 0.4 dB	± 0.16 dB	0.05 dB		
> 8.4, ≤ 26.5	≤ 40	Off ¹	± 0.7 dB	± 0.20 dB	0.05 dB		
≥ 26.5, < 34.4	≤ 40	Off ¹	± 0.8 dB	± 0.25 dB	0.1 dB		
≥ 34.4, < 50	≤ 40	Off ¹	± 1.0 dB	± 0.35 dB	0.1 dB		
IF phase linearity (deviation from mean phase linearity)							
Center freq (GHz)	Span (MHz)	Preselector	Peak-to-peak (nominal)	RMS (nominal)			
≥ 0.03, < 3.6	≤ 40	NA	0.16°	0.041°			
≥ 3.6	≤ 40	Off ¹	1.5°	0.35°			
EVM (EVM measurement floor for an 802.11g OFDM signal, using 89600B software equalization, channel estimation and data EQ)							
2.4 GHz			-52.0 dB (0.25%) nominal				
5.8 GHz with Option MPB			-49.1 dB (0.35%) nominal				
Dynamic range (B40 IF path)							
SFDR (Spurious-free dynamic range)							
Signal frequency within ± 12 MHz of center		-80 dBc nominal					
Signal frequency anywhere within analysis BW							
Spurious response within ± 18 MHz of center		-79 dBc nominal					
Response anywhere within analysis BW		-77 dBc nominal					
Full scale (ADC clipping)							
Default settings, signal at CF (IF gain = Low: IF gain offset = 0 dB)							
Band 0		-8 dBm mixer level nominal					
Bands 1 through 4		-7 dBm mixer level nominal					
High gain setting, signal at CF (IF gain = High)							
Band 0		-18 dBm mixer level nominal, subject to gain limitations					
Bands 1 through 4		-17 dBm mixer level nominal, subject to gain limitations					
Effect of signal frequency ≠ CF							
		Up to ± 3 dB nominal					

1. Option MPB is installed and enabled.

I/Q Analyzer (continued)

Option B40 40 MHz analysis bandwidth

Data acquisition (B40 IF path)		
Time record length		
Analysis tool		
IQ analyzer	4,000,000 IQ sample pairs	Waveform measurement
Advanced tools	Data packing 32-bit 64-bit	89600 VSA software or fast capture
Length (IQ sample pairs)	536 MSa (2^{29} Sa)	268 MSa (2^{28} Sa)
Length (time units)	Samples/Sample rate (IQ pair)	
Sample rate		
IQ pairs	Span x 1.25	
ADC resolution	12 bits	

Option B85 85 MHz or B1X 160 MHz analysis bandwidth

IF frequency response (B85 or B1X IF path)					
IF frequency response					
Center freq. (GHz)	Span (MHz)	Preselector	Typical	RMS (nominal)	Relative to center frequency
$\geq 0.1, < 3.6$	≤ 85	NA	± 0.6 dB	± 0.17 dB	0.05 dB
	≤ 140	NA	± 0.6 dB	± 0.25 dB	0.05 dB
	≤ 160	NA	± 0.2 dB (nom)		0.07 dB
$\geq 3.6, \leq 8.4$	≤ 85	Off ¹	± 0.73 dB	± 0.2 dB	0.05 dB
	≤ 140	Off ¹	± 0.8 dB	± 0.35 dB	0.05 dB
	≤ 160	Off ¹	± 0.3 dB (nom)		0.07 dB
$> 8.4, \leq 26.5$	≤ 85	Off ¹	± 1.10 dB	± 0.50 dB	0.1 dB
	≤ 140	Off ¹	± 1.30 dB	± 0.75 dB	0.1 dB
	≤ 160	Off ¹	± 0.5 dB (nom)		0.12 dB
$\geq 26.5, \leq 50$	≤ 85	Off ¹	± 1.20 dB	± 0.45 dB	0.12 dB
	≤ 140	Off ¹	± 1.40 dB	± 0.65 dB	0.12 dB
IF phase linearity (deviation from mean phase linearity)					
Center freq (GHz)	Span (MHz)	Preselector	Peak-to-peak (nominal)	RMS (nominal)	
$\geq 0.03, < 3.6$	≤ 140	NA	0.9°	0.20°	
	≤ 160	NA	1.7°	0.42°	
	≤ 140	Off ¹	1.6°	0.39°	
	≤ 160	Off ¹	2.8°	0.64°	
EVM (EVM measurement floor)	Customized settings required, preselector bypassed (Option MPB) above Band 0				
Case 1: 62.5 Msymbol/s, 16QAM signal, RRC filter alpha of 0.2, non-equalized, with approximately 75 MHz occupied bandwidth					
Band 0, 1.8 GHz	0.8% nominal				
Band 1, 5.95 GHz	1.1% nominal				
Case 2: 104.167 Msymbol/s, 16QAM signal, RRC filter alpha of 0.35, non-equalized, with approximately 140 MHz occupied bandwidth					
Band 1, 5.95 GHz	3.0% nominal, (unequalized)		0.5% nominal, (equalized)		
Band 2, 15.3 GHz	2.5% nominal, (unequalized)		0.6% nominal, (equalized)		
Band 4, 26 GHz	3.5% nominal, (unequalized)		1.6% nominal, (equalized)		
Effect of signal frequency \neq CF	Up to ± 3 dB nominal				

1. Option MPB is installed and enabled.

I/Q Analyzer (continued)

Option B85 85 MHz or B1X 160 MHz analysis bandwidth

Dynamic range (B85 or B1X IF path)		
SFDR (Spurious-free dynamic range)		
Signal frequency within ± 12 MHz of center	-75 dBc nominal	
Signal frequency anywhere within analysis BW		
Spurious response within ± 63 MHz of center	-74 dBc nominal	
Response anywhere within analysis BW	-72 dBc nominal	
Full scale (ADC clipping)		
Default settings, signal at CF (IF gain = Low; IF gain offset = 0 dB)		
Band 0	-8 dBm mixer level nominal	
Band 1 through 4	-7 dBm mixer level nominal	
High gain setting, signal at CF (IF gain = High)		
Band 0	-18 dBm mixer level nominal, subject to gain limitations	
Band 1 through 4	-17 dBm mixer level nominal, subject to gain limitations	
Effect of signal frequency \neq CF	Up to ± 3 dB nominal	
Data acquisition (B85 or B1X IF path)		
Time record length		
Analysis tool		
IQ analyzer	4,000,000 IQ sample pairs	Waveform measurement
Advanced tools	Data packing 32-bit 64-bit	89600 VSA software or fast capture
Length (IQ sample pairs)	536 MSa (2^{29} Sa)	268 MSa (2^{28} Sa)
Length (time units)	Samples/Sample rate (IQ pair)	
Sample rate		
IQ pairs	Span x 1.25	
ADC resolution	14 bits	

Real-time spectrum analyzer (RTSA)¹

Option RT1 or RT2

Real-time analysis		
Real-time analysis bandwidth		
Option RT1	Up to 160 MHz	Analysis BW option determines the max real-time bandwidth
Option RT2	Up to 160 MHz	Analysis BW option determines the max real-time bandwidth
Minimum detectable signal duration with > 60 dB StM ² ratio		
Option RT1	11.42 ns	
Option RT2	5.0 ns	
Minimum signal duration with 100% probability of intercept (POI) at full amplitude accuracy		For Frequency Mask Triggering (FMT)
Option RT1	17.3 μ s	Signal is at mask level
Option RT2	3.57 μ s	Signal is at mask level
Minimum acquisition time	100 μ s	
FFT rate	292,969/s	

1. For additional RTSA specifications, please refer to Option RT1/RT2 Chapter in the PXA Signal Analyzer specifications guide
 2. StM = "Signal-to-Mask"

Related Literature

Keysight PXA signal analyzers

Brochure	5990-3951EN
Configuration guide	5990-3953EN

myKeysight

myKeysight

www.keysight.com/find/mykeysight

A personalized view into the information most relevant to you.

www.lxistandard.org

LAN eXtensions for Instruments puts the power of Ethernet and the Web inside your test systems. Keysight is a founding member of the LXI consortium.

Three-Year Warranty

www.keysight.com/find/ThreeYearWarranty

Keysight's commitment to superior product quality and lower total cost of ownership. The only test and measurement company with three-year warranty standard on all instruments, worldwide.



Keysight Assurance Plans

www.keysight.com/find/AccurancePlans

Up to five years of protection and no budgetary surprises to ensure your instruments are operating to specification so you can rely on accurate measurements.



www.keysight.com/quality

Keysight Technologies, Inc.

DEKRA Certified ISO 9001:2008

Quality Management System



Keysight Channel Partners

www.keysight.com/find/channelpartners

Get the best of both worlds: Keysight's measurement expertise and product breadth, combined with channel partner convenience.

cdma2000® is a registered certification mark of the Telecommunications Industry Association.

www.keysight.com/find/N9030A

www.keysight.com/find/PXA

www.keysight.com/find/xseries_apps

For more information on Keysight Technologies' products, applications or services, please contact your local Keysight office. The complete list is available at: www.keysight.com/find/contactus

Americas

Canada	(877) 894 4414
Brazil	55 11 3351 7010
Mexico	001 800 254 2440
United States	(800) 829 4444

Asia Pacific

Australia	1 800 629 485
China	800 810 0189
Hong Kong	800 938 693
India	1 800 112 929
Japan	0120 (421) 345
Korea	080 769 0800
Malaysia	1 800 888 848
Singapore	1 800 375 8100
Taiwan	0800 047 866
Other AP Countries	(65) 6375 8100

Europe & Middle East

Austria	0800 001122
Belgium	0800 58580
Finland	0800 523252
France	0805 980333
Germany	0800 6270999
Ireland	1800 832700
Israel	1 809 343051
Italy	800 599100
Luxembourg	+32 800 58580
Netherlands	0800 0233200
Russia	8800 5009286
Spain	0800 000154
Sweden	0200 882255
Switzerland	0800 805353
Opt. 1 (DE)	
Opt. 2 (FR)	
Opt. 3 (IT)	
United Kingdom	0800 0260637

For other unlisted countries:
www.keysight.com/find/contactus
(BP-07-10-14)